# INSTALLATION INSTRUCTIONS

For Model 8764

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**HANGING THE FIXTURE (Fig. 1)**

1. Shut off the power at the circuit breaker and remove old fixture, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Thread the 2 Mounting Screws (B) to the Cross Bar(C), and then secure with 2 Lock Nuts.(You can adjust the length of the screws if necessary.)
4. Attach the Cross Bar(C) to the Outlet Box (A)(not supplied using the 2 screws provided with the Outlet Box(B).
5. Install bulbs. (Type-B. not supplied)
6. Attach cover (D) to the Fixture using the 2 Screws (E)
7. Turn on the power at fuse or circuit box.

**CONNECTING THE WIRES (Fig. 2)**

1. At this point, connect the electrical wires as follows:

   Connect the black wire from the fixture to the black (hot) house wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to the crossbar using the green screw provided. Tuck the wire connections neatly into the ceiling junction box.

**DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**

**Your installation is now complete. Return power to the junction box and test the fixture.**

**MIN 90˚C SUPPLY CONDUCTOR**

**Fig. 1**

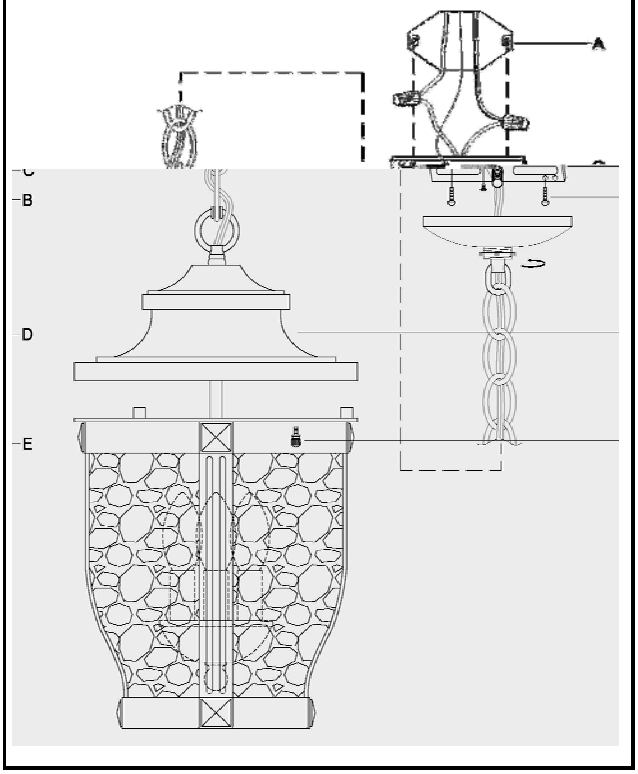


**Fig. 2**

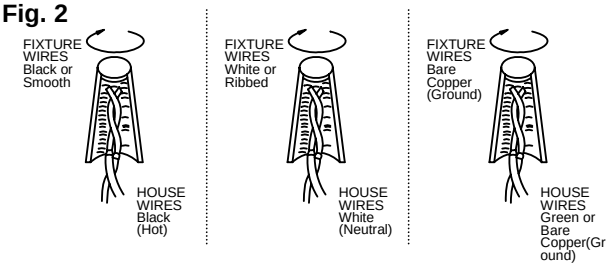
FIXTURE WIRES Black or Smooth
HOUSE WIRES Black (Hot)
FIXTURE WIRES White or Ribbed
HOUSE WIRES White (Neutral)
FIXTURE WIRES Bare Copper (Ground)
HOUSE WIRES Green or Bare Copper(Ground)

UL® Listed american lighting association